

FAT FLOOR / WHITE DOUBLE STICK

FatFloor is designed for medium to long-term applications. It can be used for almost all surfaces as it will be delivered without self-adhesive rear and therefore easily applied on the floor. Printing is done on the reverse side of the film and in two steps. First, the design is printed mirror-inverted and in the second step a white layer is printed. If you do not have the color option white, you can apply our product "White DoubleStick" on the back of the FatFloor. With this option you have the white layer on the back of the FatFloor and the adhesive on the other side of the material for the application to the surface. The product can also be applied with a double-sided tape (CarpetTape). FatFloor is very resistant against wear and other influences, as the printing is done on the reverse side and therefore no color wear can occur due to mechanical impact, if it is caused by the usual use of the product.

Durability

The durability of FatFloor is depending on the application, especially on the surface where it has been applied as well as the mechanical strain. Based on our experience we recommend a maximum use of 3 years.

Printing method

UV curable inks, solvent, ecosolvent and latex (except 300 and 500 series)


FatFloor is printable with latex but only on the XXL machines. The small 300 and 500 series can't print on the material. Print the image the reverse side on the back of the material and than print another layer of white or use our product "White DoubleStick"

Storage

Shelf life is 12 months from the date of delivery. Storage conditions +15°C to +24°C and relative humidity between 40% and 65%.

Waste handling

It is recommended to handle the used material and production waste as industrial waste.

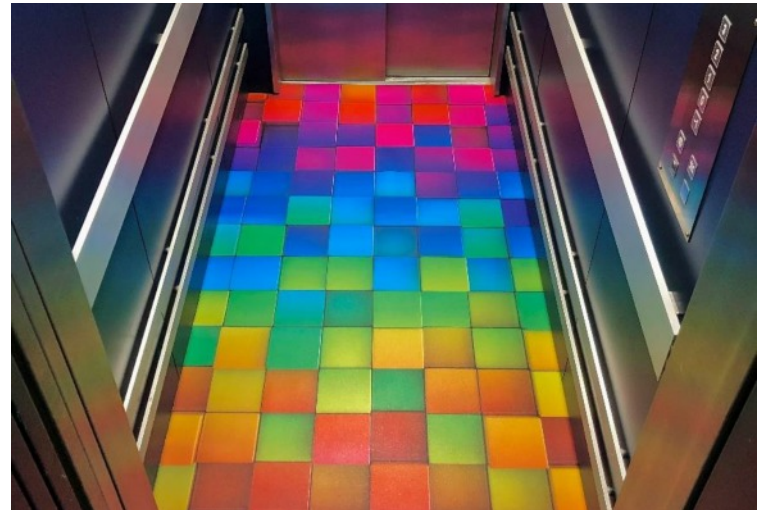

Warranty

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specification.

Uses

- Retail entrances
- Museum Exhibits
- High-Traffic Event Graphics
- Showrooms, car showrooms
- Counter mats

Features & Benefit

- Simple application and removal
- very robust
- extremely slip-resistant

Distributed in the UK by:

Technical Information		FatFloor
Size	Width: 1.37 m Length: 15.00 m	
Material	clear, slip-resistant textured vinyl	1300µ +/- 10µ
Certificates	Slip-resistance	R10
Application	Minimum application temperature	+10°C / +50°F

Technical Information		White DoubleStick
Size	Width: 1.37 m Length: 30.00 m	
Material	Glossy, white, calendered PVC film	70µ +/- 10µ
Adhesive	Solvent based permanent clear adhesive	25 µ +/- 10µ
Application	When the print is dry, apply the "White DoubleStick" to the FatFloor with a laminator	

Chemical Resistance			
Water	R	Diesel Fuel / Gasoline unleaded	R
10% Salt Water	R	Hydraulic Fluid	R
Bleach	R	50% Anti-freeze in water	R
Trichloroethylene	NR	Methyl Ethyl Ketone	NR
25% Sulphuric Acid	I	Mineral Spirits	R
1% Sodium Hydroxide	R	99% IPA	R

R = recommended for non continuous immersion
 I = recommended for intermittent exposure only
 NR = not recommended

* Colour and lot variances of coated surfaces including paints, powder coatings, lacquers, stains and other treatments may vary the performance of the tape and should be evaluated for the compatibility of the tape to the specific surface. **At temperatures below +10 °C the surface has to be pre-treated with a gas burner.

Distributed in the UK by:

INNOTECH

innotechdigital.com / 01530 512 731 / sales@innotechdigital.com