

DirectTex[®] Artist Heavy[®]

Fields of application

.02 .04 .05 .07

Specifications



564250 088



100 % polyester
weave fabrics
PVC-free, recyclable



ca. 103/ 155/ 252/ 310/ 505 cm
ca. 41/ 61/ 99/ 122/ 199 inch
other widths available on request



B-s1, d0 DIN EN 13501-1



ca. 255 g/m²
ca. 7.5 oz/yd²



ca. 0.38 mm
ca. 380 μm



rolls
50 m
55 yd



blank: 31.8 %
DIN EN 410



cold, heat, ultrasonic cut

Printing methods

print	UV	Latex	Dyesub
Inside	•	•	•
Outside			

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,8 %	0,8 %	
190°C	0,8 %	0,9 %	•
200°C	1,7 %	1,6 %	
210°C	1,9 %	2,4 %	


Certifications



DirectTex® Artist Heavy®

Fields of application

.02 .04 .05 .07

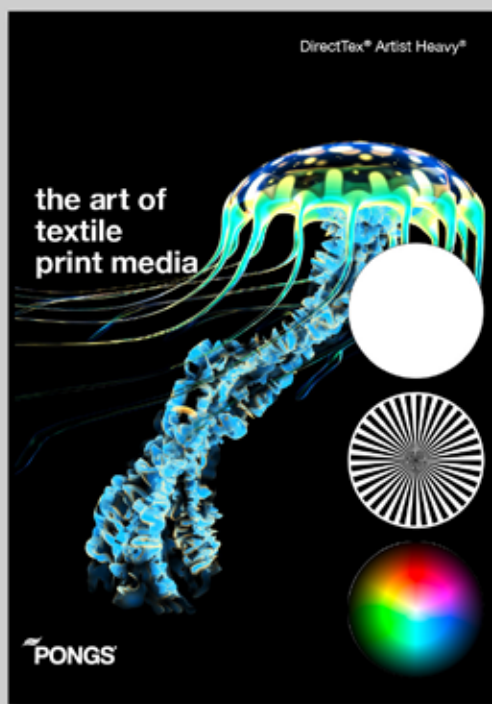

Ref.-Nr.: 564250 088 | Preview print sample