












# PrintTex®




## Softimage Lightbox

Fields of application

**.02 .04 .05 .06 .07 .11**

### Specifications

-  **REF.** 599180 173
-  100 % polyester  
knit fabrics  
PVC-free
-  ca. 155/ 252/ 310/ 505 cm  
ca. 61/ 99/ 122/ 199 inch  
other widths available on request
-  B-s1, d0    DIN EN 13501-1  
Class A     ASTM E84-16
-  ca. 205 g/m<sup>2</sup>  
ca. 6.1 oz/yd<sup>2</sup>
-  ca. 0.36 mm  
ca. 360 µm
-  rolls  
50/ 100 m  
55/ 109 yd
-  blank: 5  
DIN EN ISO 105-B02
-  **Light**  
blank: 35.7 %  
DIN EN 410
-  blank: 93.7  
DIN 5033-1
-  length: 2.2 %  
cross: 0.9 %  
DIN EN 14704-1
-  indirect, direct light
-  cold, ultrasonic cut

-  length: 290.7 N  
cross: 1119.3 N  
DIN EN ISO 13934-1 - max. tensile strength
-  length: 65.4 %  
cross: 34.0 %  
DIN EN ISO 13934-1 - max. tensile elongation
-  length: 26.1 N  
cross: 13.7 N  
DIN EN ISO 13937-2 - trouser tear propagation

### Printing methods

print	UV	Latex	Dyesub
Inside	•	•	
Outside			


### Certifications



## PrintTex® Softimage Lightbox

Fields of application

**.02 .04 .05 .06 .07 .11**

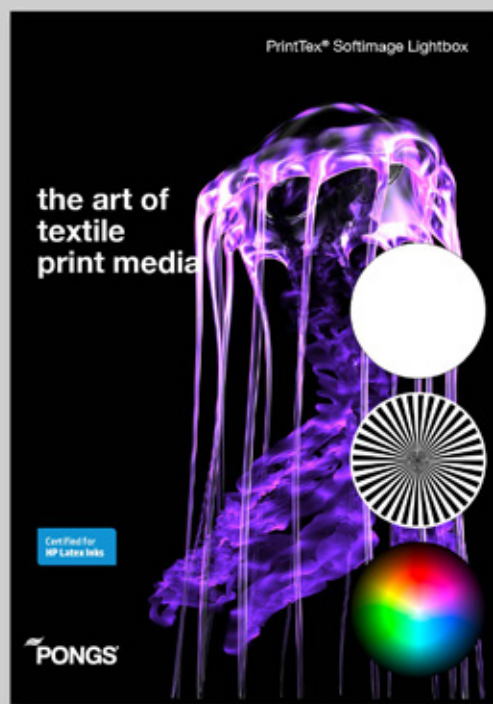

Ref.-Nr.: 599180 173 | Preview print sample