

TEX WALK®

TexWalk® is a fabric with a textured matte vinyl coating. It is designed to be used for short to midterm applications, dependent on where the product is applied. TexWalk® works indoor great on carpet, tile, concrete, wooden and PVC floors, untreated stone and many other surfaces. Outdoor it performs well on smooth tarmac, pavements, bricks etc.

Durability

The durability of TexWalk® is dependent on the way the product has been applied and it also depends on the mechanical use of the surface where it is applied. Our experiences suggest the following:

- indoor floor up to 3 months (depending on traffic)
- outdoor sidewalk up to 3 months (depending on traffic)
- indoor wall up to 36 months
- outdoor wall up to 12 months

Life time can be significantly extended with EasyProtect liquid varnish.

Printing method

UV curable inks, solvent, ecosolvent and latex

Storage

Shelf life is 12 months from the date of delivery. Storage conditions +15°C to +24°C and relative humidity between 40% and 65%.

Waste handling

We recommend to handle the production waste and the used material as industrial waste.



Warranty


Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warranties of any kind are made to the accuracy of suitability for specification.

Uses

Indoor: Works great on top of carpeting, tiles, wooden and PVC floors and untreated stone
Outdoor: Performs well on smooth tarmac, pavement, bricks etc.
 Wall graphics and door coverage
 Tradeshows (exhibition walls and floors)
 POP / POS

Features & Benefit

Structured matte finish
 No or almost no adhesive residue
 Sticks on almost any surface
 Easy to apply and remove
 Print and go - no lamination solution
 Digital cutting into any shape

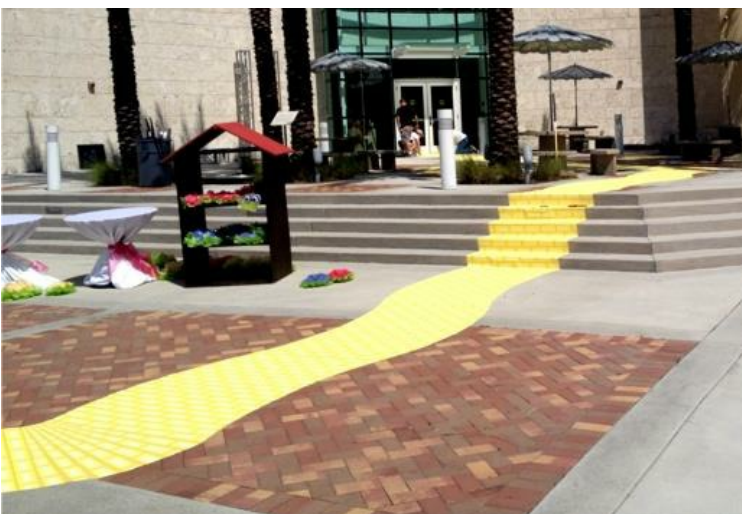

Distributed in the UK by:

Technical Information**TexWalk**

Size	Width: 1.22 m Length: 25.0 m, 50.00 m	
Material	Fabric with a textured matte vinyl coating (white)	0.10 - 0.25 mm
Adhesive	Permanent acrylic solvent	80µ +/- 5µ
Certificates	Slip-resistance	R12 / 67212F
	Flame resistance	M1 / F3
	Railway applications – Fire protection on railway vehicles	DIN EN 45545-2
Application	Minimum application temperature	-20°C / -4°F

Distributed in the UK by:

INNOTECH

innotechdigital.com / 01530 512 731 / sales@innotechdigital.com