

DirectTex® Poplin Plus

Fields of application

.02 .04 .05 .07

Specifications



599200 129



100 % polyester
knit fabrics
PVC-free, recyclable



ca. 252/ 320/ 505 cm
ca. 99/ 126/ 199 inch
other widths available on request



B-s1, d0 DIN EN 13501-1



ca. 175 g/m²
ca. 5.2 oz/yd²



ca. 0.39 mm
ca. 390 µm



rolls
50/ 100 m
55/ 109 yd



cold, heat, ultrasonic cut

Printing methods

print	UV	Latex	Dyesub
Inside	•		•
Outside			

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,4-0,5 %	1,5 %	
190°C	/ %	/ %	
200°C	/ %	/ %	•
210°C	0,8-1,0 %	4,1 %	


Certifications



DirectTex® Poplin Plus

Fields of application

.02 .04 .05 .07

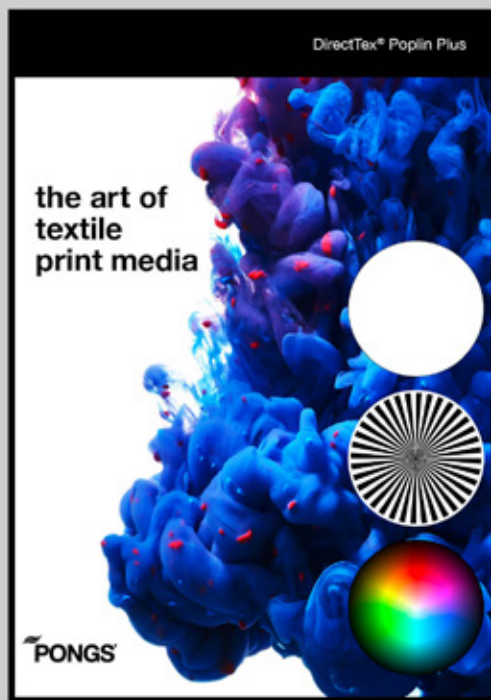

Ref.-Nr.: 599200 129 | Preview print sample